


SY-S200W

High Efficiency, High Quality PV Module

Electrical Characteristics	SY-S200W
Maximum power (Pmax)	200W
Voltage at Pmax (Vmp)	17.0V
Current at Pmax (Imp)	11.8A
Open-circuit voltage (Voc)	20.4V
Short-circuit current (Isc)	12.5A
Temperature coefficient of Voc	-(0.40 ± 0.05)%/ °C
Temperature coefficient of Isc	(0.065 ± 0.01)% /°C
Temperature coefficient of power	-(0.5±0.05)%/ °C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	± 3%
Cells	monocrystalline silicon solar cell
No. of cells and connections	60(4 x15)
Module Dimension	1378mm[54.25in.]x770mm[30.31in.]x30mm[1.18in.]
Weight	10.7kg[23.54lbs]

* STC:Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C
 * Specifications are subject to change without notice at any time.

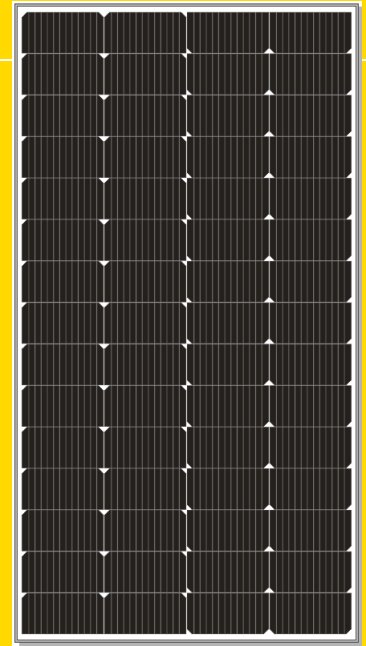

Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 10 years product warranty (materials and workmanship)
- 25 years module power output warranty
- Peak power of single module is guaranteed in ±3% power tolerance
- Strong framed module, passing loaded test of 5400 Pa (IEC61215 2nd)
- The manufacture is certified for ISO 9001:2015


Product's Guarantee

- 10 years products life warranty
- 15 years module power output no less 90%
- 25 years module power output no less 80%


Applications

- Off grid residential roof-tops
- Off grid commercial/industrial roof-tops
- Rural area applications
- Solar power system
- Other off-grid applications


Module Diagram

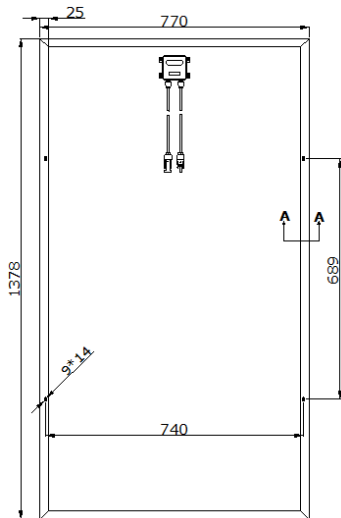

Dimensions in brackets are in inches.
 Un-bracketed dimensions are in millimeters.
 Unit:mm[in.]




Junction Box
 Top View (Lid open)



Section A-A

I-V Curves

I-V Curves of PV module SY-S200W

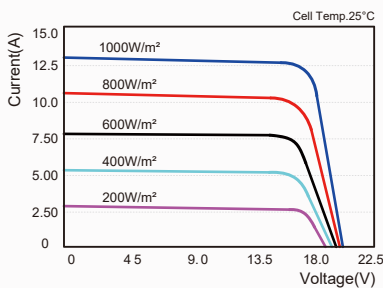

I-V Curves of PV module SY-S200W at various cell temperatures

